

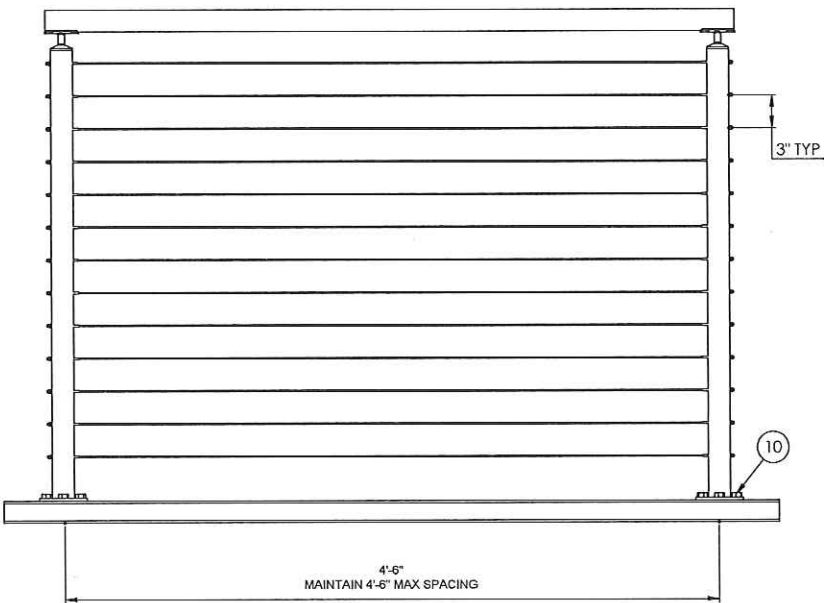
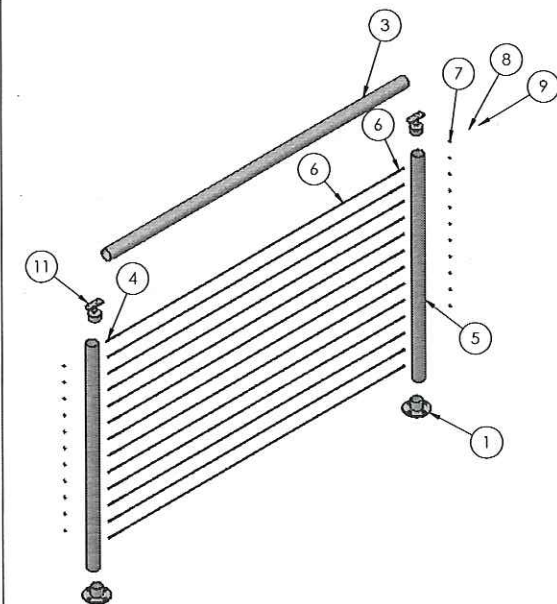






ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	05-155-01	STAINLESS STEEL 2" WALL / FLOOR FLANGE / 4 HOLE	2
2	05-300-01	TERMINAL POST (STAINLESS STEEL)	2
3	05-300-01	ROUND TOP RAIL (STAINLESS STEEL)	1
4	01-008S-01 OR 01-028S-01	FIELD THREADED TERMINAL	13
5	01-0008-01 OR 01-028-01	FIELD THREADED TENSIONER	13
6	Stainless Cable	1/8" or 3/16" DIA.	13
7	Stainless Washer	STD	26
8	Stainless Hex Nut	STD	26
9	Stainless Acorn Nut	STD	26
10	LAG BOLT 0.375" Dia.	STD	8
11	05-210-01	Stainless 2" Post Cap Fixed - Radius Saddle	2

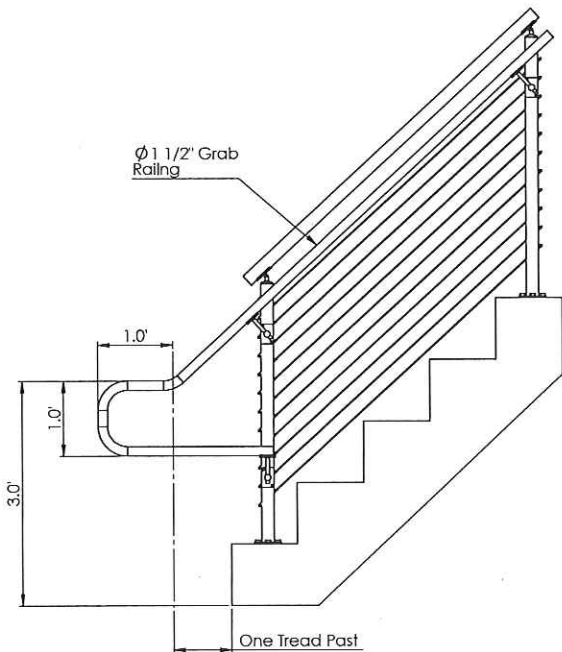


LEVEL 42" STANDARD GUARD RAILING

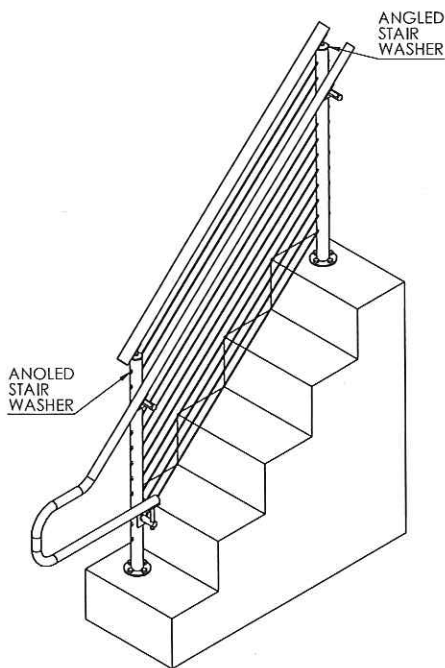


STAIRS 42" STANDARD GUARD RAILING

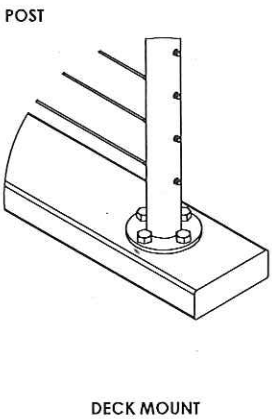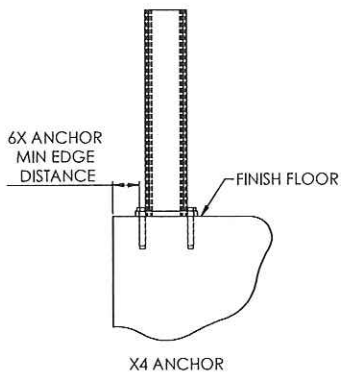

DECK MOUNT

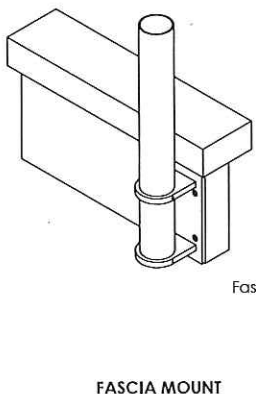


FASCIA MOUNT



CORE MOUNT


TYPICAL MOUNTING OPTIONS

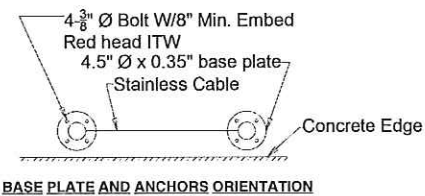

BASE PLATE AND ANCHORS ORIENTATION



TOP RAIL OPTIONS


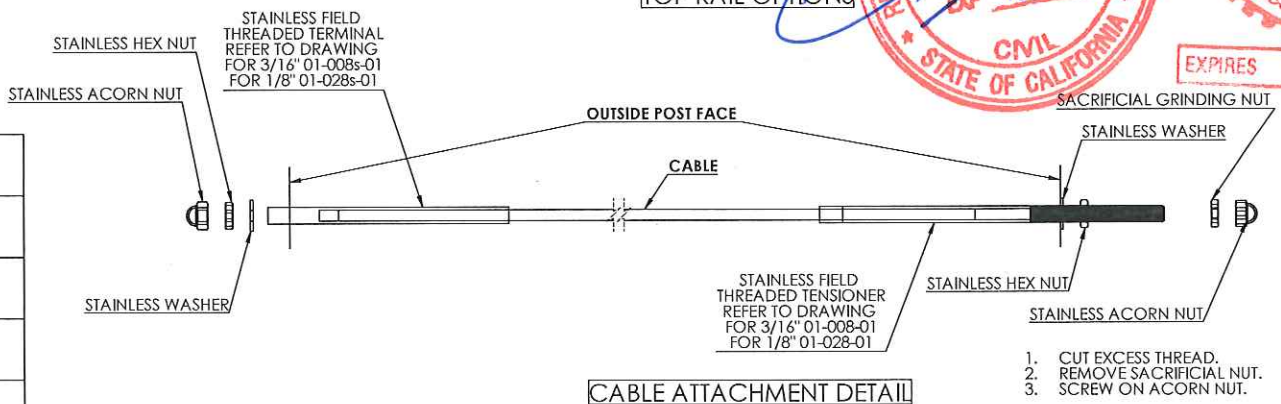


CABLE ATTACHMENT DETAIL




REV	DATE	DESCRIPTION OF CHANGE	ECN	BY	APPR
REVISIONS					
TOLERANCES .XX ±.01 .XXX ±.005 ANGULAR ±0.5° SPECIFIED FRACTIONAL ±1/32			THIS DRAWING IS THE PROPERTY OF STAINLESS CABLE & RAILING AND IS PROTECTED UNDER COPYRIGHT LAW AS AN UNPUBLISHED WORK. IT MAY NOT BE PUBLISHED, COPIED OR REPRODUCED WITHOUT EXPRESS WRITTEN PERMISSION FROM SC&R		
DRAWN BY: PA			DATE: **		
PROJECT: **			TITLE: CABLEVIEW® STAINLESS ROUND 42" RAILING		
			DRG NO. CV-SR 42		
			SHEET 1 OF 1		


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	05-155-01	STAINLESS STEEL 2" WALL / FLOOR FLANGE / 4 HOLE	2
2	05-300-01	TERMINAL POST (STAINLESS STEEL)	2
3	05-300-01	ROUND TOP RAIL (STAINLESS STEEL)	1
4	01-0085-01 OR 01-0285-01	FIELD THREADED TERMINAL	11
5	01-0008-01 OR 01-028-01	FIELD THREADED TENSIONER	11
6	Stainless Cable	1/8" or 3/16" DIA.	11
7	Stainless Washer	STD	22
8	Stainless Hex Nut	STD	22
9	Stainless Acorn Nut	STD	22
10	LAG BOLT 0.375" Dia.	STD	8
11	05-210-01	Stainless 2" Post Cap Fixed - Radius Saddle	2

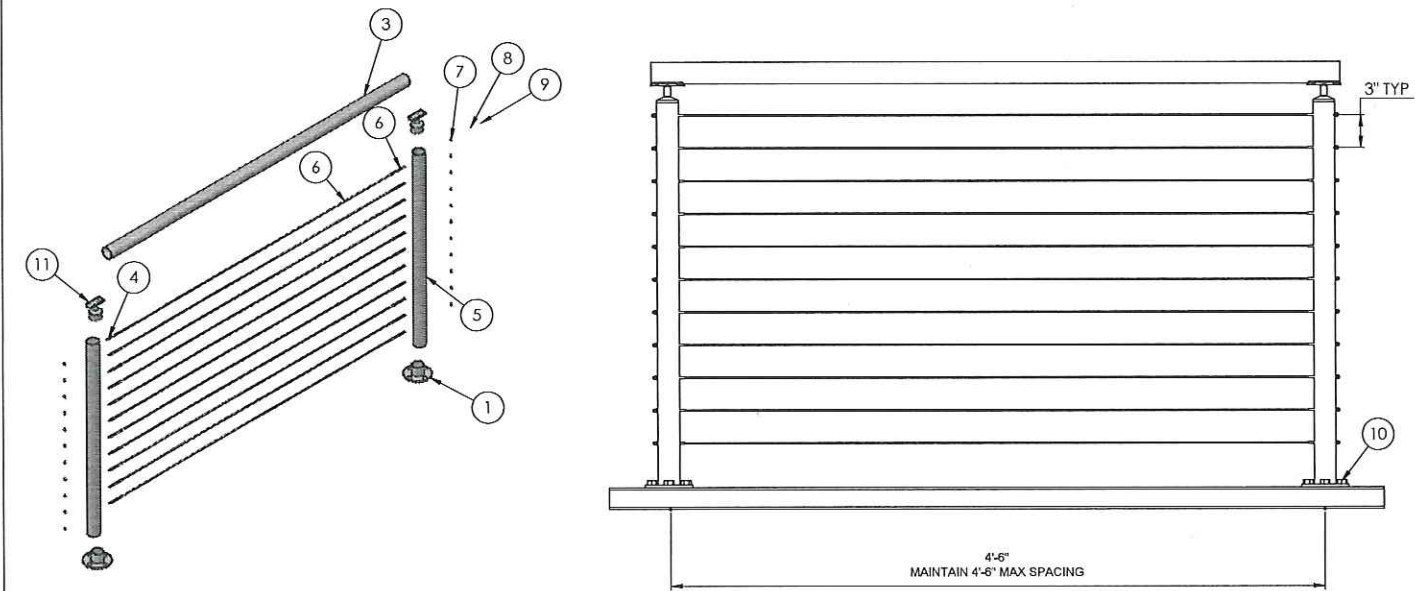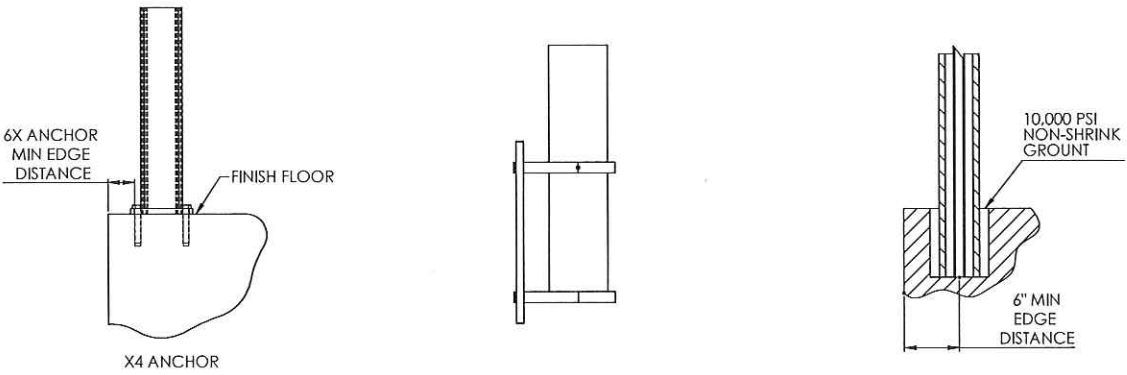


LEVEL 36" STANDARD GUARD RAILING

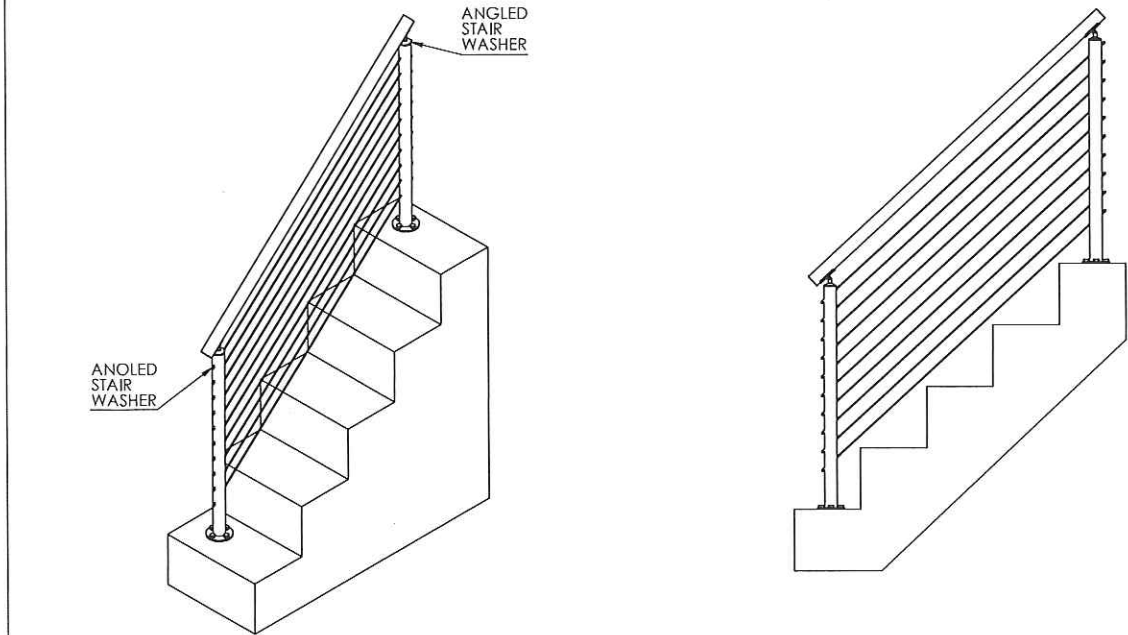


STAIRS 36" STANDARD GUARD RAILING

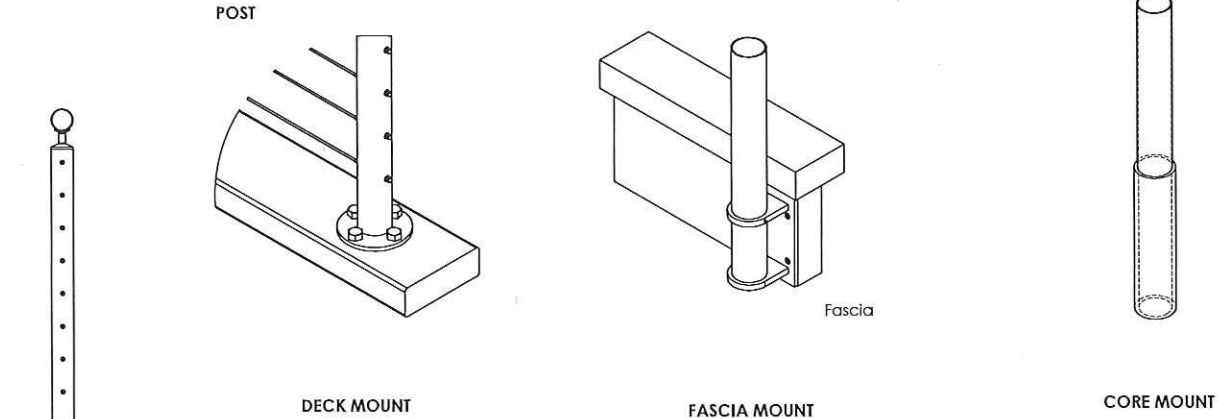

TYPICAL MOUNTING OPTIONS

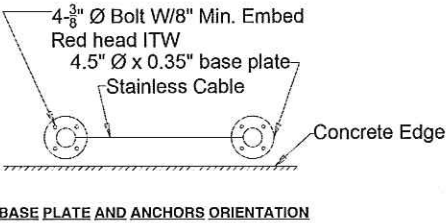

TOP RAIL OPTIONS

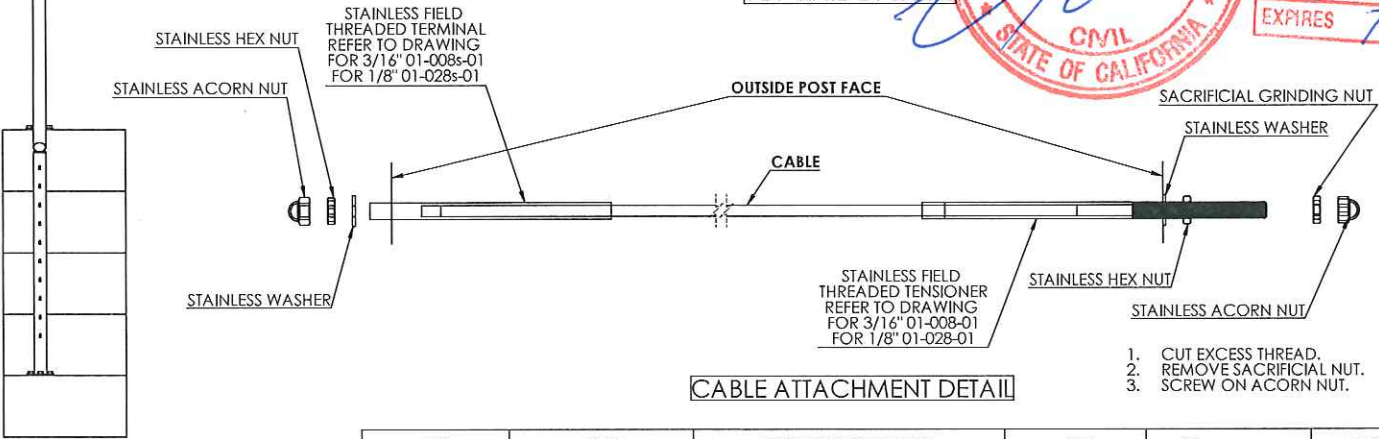

REV	DATE	DESCRIPTION OF CHANGE	ECN	BY	APPR
REVISIONS					
TOLERANCES .XX ±.01 .XXX ±.005 ANGULAR ±0.5° SPECIFIED FRACTIONAL ±1/32		UNLESS OTHERWISE SPECIFIED		THIS DRAWING IS THE PROPERTY OF STAINLESS CABLE & RAILING AND IS PROTECTED UNDER COPYRIGHT LAW AS AN UNPUBLISHED WORK. IT MAY NOT BE PUBLISHED, COPIED OR REPRODUCED WITHOUT EXPRESS WRITTEN PERMISSION FROM SC&R	
DRAWN BY: PA		DATE: **		PROJECT: **	
TITLE: CABLEVIEW® STAINLESS ROUND 36" RAILING		DRG NO. CV-SR 36		SHEET 1 OF 1	